



Polarization enhancement of ferroelectric nanoparticles

Baekke, B.S. ; Beleggia, Marco

Published in:
Book of Abstracts. DTU's Sustain Conference 2015

Publication date:
2015

Document Version
Publisher's PDF, also known as Version of record

[Link back to DTU Orbit](#)

Citation (APA):
Baekke, B. S., & Beleggia, M. (2015). Polarization enhancement of ferroelectric nanoparticles. In *Book of Abstracts. DTU's Sustain Conference 2015* [M-10] Technical University of Denmark.

General rights

Copyright and moral rights for the publications made accessible in the public portal are retained by the authors and/or other copyright owners and it is a condition of accessing publications that users recognise and abide by the legal requirements associated with these rights.

- Users may download and print one copy of any publication from the public portal for the purpose of private study or research.
- You may not further distribute the material or use it for any profit-making activity or commercial gain
- You may freely distribute the URL identifying the publication in the public portal

If you believe that this document breaches copyright please contact us providing details, and we will remove access to the work immediately and investigate your claim.

Polarization enhancement of ferroelectric nanoparticles

B.S. Baekke¹, M. Beleggia^{*1}

1: DTU Danchip/Cen

*<mailto:marco.beleggia@cen.dtu.dk>

Ferroelectric (fe-) nanostructures are the core elements of several modern technologies, from fe-capacitors, to random access memories (fe-RAM, a viable alternative to the popular flash memory). They bring the promise of *lower power consumption, increased durability and speed* over existing technologies for information storage and manipulation. A physical limitation is, however, preventing their large-scale implementation: *the polarization is suppressed at small sizes* [1]. We demonstrate here why this is the case, and illustrate a possible avenue for *enhancing the polarization of ferroelectric nanoparticles* with suitable energy-relief mechanisms to *create the smallest ferroelectric capacitor yet*. Our strategy is to embed the structures in a matrix to screen the depolarizing field while preventing the formation of domains, and to exploit elongation and shape effects by controlled lithographic patterning. Aiming at achieving spatially-resolved measurements of the polarization with electron holography, we estimate the signal to be expected in the electron microscope and support the feasibility of such experiments. Electron holography, a specialty of DTU Cen, is a phase-sensitive technique in transmission electron microscopy capable of detecting the fields generated by elementary charges [2] and spins inside materials while maintaining near-atomic spatial resolution. Combining theoretical and experimental analysis will provide us with the opportunity to *develop functional ferroelectric nanodevices with a degree of miniaturization, performance and sustainability far greater than what currently possible*.

[1] Phatak C et al., Phys Rev B 89 (2014) 214112

[2] Beleggia M et al., Appl Phys Lett 98 (2011) 243101

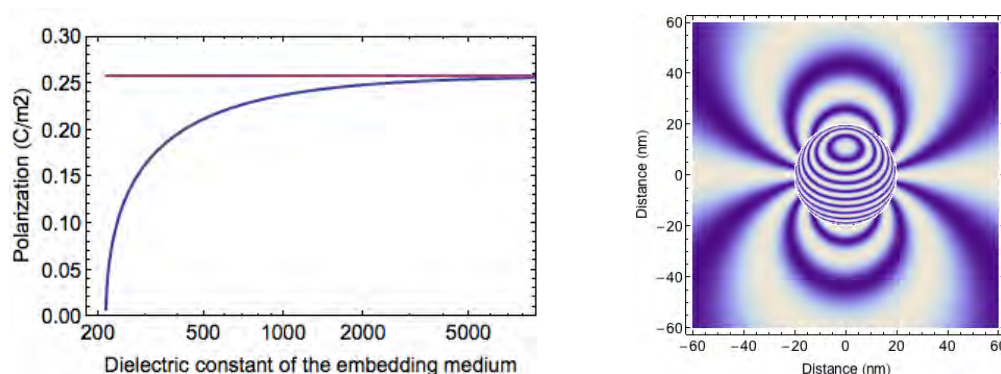


Figure 1. Left: polarization of a hypothetical single-domain BaTiO nanoparticle as a function of the dielectric constant of the embedding medium; the polarization vanishes below a critical value of $\epsilon_r=214$. Right: cosine-map (256x amplified) representation of the electron-holographic phase shift for a BaTiO nanoparticle when $\epsilon_r=300$ with the effect of the mean-inner-potential (MIP) added to that of the polarization; the particle radius is 20 nm, the accelerating voltage 300 kV, and the MIP 1 V.